

POWER ARM ATTACHMENTS

MULTISAW

Made from high-tensile steel and armed with the bite of super-strength tungsten carbide teeth, McConnell Multisaws deliver the perfect combination of a powerful cutting action and long-lasting durability.

POWER ARM ATTACHMENTS

ROTARY HEAD

For those looking for an alternative robust cutting attachment, McConnell offers a range of five different rotary heads with a choice of working widths from 1.2m to 1.5m.

MULTISAW COMPACT

1400, 2100, 2800

Technical specification

- 1.4m, 2.1m and 2.8m working widths
- 100mm maximum cutting
- Minimum oil flow 40 ltrs/min
- 400mm blade diameter
- Hard wearing teeth
- Weight from 50kg

SUITABILITY

30-series
Versi-series



MULTISAW SD


1600

Technical specification

- 1.6m working width
- 120mm maximum cutting
- Minimum oil flow 50 ltrs/min
- 500mm blade diameter
- Hard wearing teeth
- Weight from 100kg

SUITABILITY

30-series
45-series
Versi-series

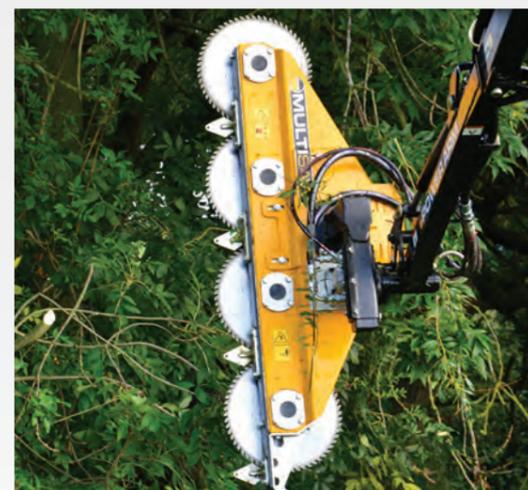

MULTISAW HD

2000 / 2400

Technical specification

- 2.0m and 2.4m working widths
- 150-200mm maximum cutting
- Minimum oil flow 50 - 85 ltrs/min
- 500mm or 600mm blade diameter
- Hard wearing teeth
- Easy to replace blades
- Weight from 220kg

SUITABILITY

45-series
55-series
60-series
65-series
70-series
85-series
Versi-series



FINE CUT ROTARY HEAD

Technical specification

- 1.2m working width
- 25mm maximum cutting
- Minimum oil flow 45 ltrs/min
- Two rotors hydraulically driven
- Hard wearing blades
- Weight from 130kg

SUITABILITY

30-series
45-series
55-series
Versi-series



ROTARY HEAD MD/HD

Technical specification

- 1.2m and 1.5m working width
- 100mm maximum cutting
- Minimum oil flow from 100 ltrs/min
- Single rotor hydraulically driven
- Blade or chain option
- Weight from 260kg
- Deep pan option available

SUITABILITY

55-series
60-series
65-series
70-series
85-series
Versi-series

